




Vela Electric Instructions

Please unpack your delivery carefully and inspect the radiator and contents – any damages or shortages must be notified to your supplier within 3 days of delivery of your goods.

SPECIFICATIONS FOR VELA ELECTRIC RADIATOR

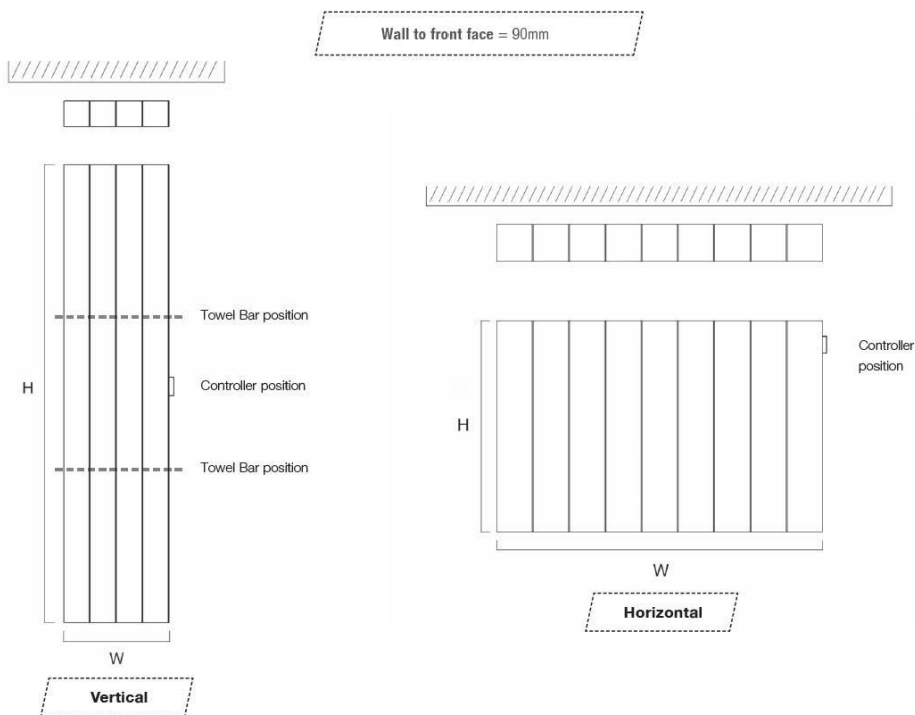

| | |
|---|---|
| Power Supply: | 230V 50Hz +/-10% |
| Power control type: | RELAY 10A, TRIAC 10A, TRIAC 4A |
| Max power: | 2000W total (Relay + TRIAC 1 + TRIAC 2) |
| Insulation class: | Class II |
| Environment protection classification: | IPX4 |
| Operating temperature: | 0 – 50°C |
| Storage temperature: | -20 – 85°C |
| NTC sensor: | 10KOhm @25°C |
| Connection type: | Screw header 2,5mm ² |
| Regulation type: | (Relay) Hysteresis +/- 0,5°C – (Triac) PID |
| Temperature settings range: | 7– 31°C |
| User interface type: | Push-button, potentiometer |
| Visualization interface: | STN LCD display, viewing angle 12 o'clock, red back-light |

INSTALLATION and FIXING




Wall Brackets – Offer up the radiator in the desired position, mark the bracket positions and fixing holes. The radiator should be placed a minimum of 10cm from the floor. Using the appropriate drill and fixings attach the brackets to the wall. After installing the plastic inserts into the hook part of the bracket the radiator can then be hung from the brackets

Display and symbol description


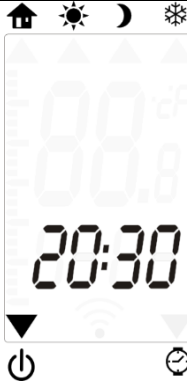




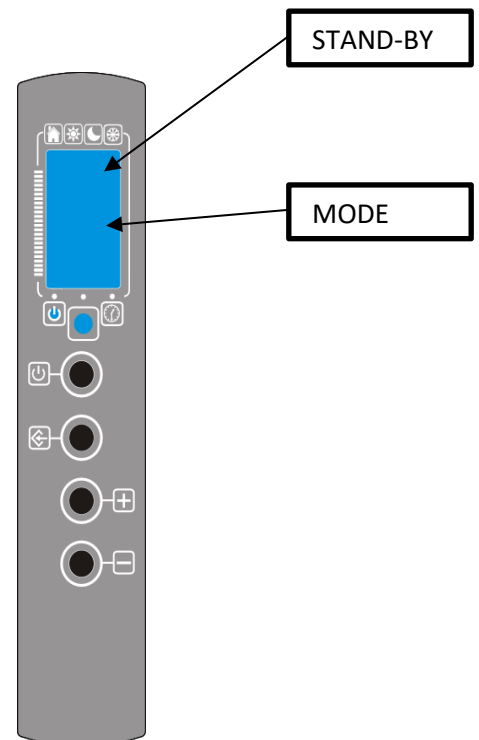


1. Mode not required
2. Comfort mode.
3. Night reduction mode
4. Antifreeze mode
5. Temperature display
6. Clock display
7. Weekly Chrono mode indicator
8. Stand-by indicator
9. Daily program bar



THERMOSTAT INSTRUCTION MANUAL

Please note: The clock needs to be set before use.

| | | | | | |
|---|---|--|-------------------------------|--|--|
| <p>Setting the clock</p> |  | <p>Setting the clock can only be done while the unit is in "stand by" mode. Press and hold the mode button until SET appears on the screen, then press the + - buttons to advance the time, holding down the buttons will advance the time more quickly. Once the time is set press the mode button to confirm. You will then need to select a day from 1 to 7 by pressing + - buttons to scroll and mode button to confirm.</p> | <p>Standby Mode</p> |  | <p>To turn the unit on or enter "stand by" mode Press and Hold the stand by button for 2 seconds. When in "stand by" the red light at the bottom left of the screen will be lit, when the unit is on the green button will be showing.</p> |
| <p>Program Mode</p> |  | <p>When the unit is turned on and in program mode (with the arrow pointing to the sun or moon and clock symbols at the same time) the temperature can only be set by selecting the required temperature in Comfort and Night modes.</p> | <p>Comfort Mode</p> |  | <p>To enter this mode, push the mode button until the arrow is pointing to the sun symbol only. In this setting the temperature will be regulated to the value set on the screen. The temperature can be adjusted by using the + and - buttons on your controller.</p> |
| <p>Night Mode</p> |  | <p>To enter night mode - push the mode button until the arrow is pointing to the moon symbol. The reduced temperature can be adjusted using the + and - buttons.</p> | <p>Antifreeze Mode</p> |  | <p>To enter the antifreeze mode - push the mode button until the arrow is pointing to the snowflake symbol. The unit will be activated if the temperature falls below 7 degrees C.</p> |
| <p>Setting the program Mode 24H / 7 day.</p> |  | <p>To set the daily thermostat you must be in a programme mode (this is shown by the arrow pointing to the sun or moon and clock symbols at the same time). Push and hold the mode button for 5 seconds until "PRO" is shown on the screen. Scroll using the + - buttons to select the day (D1 = Monday through to D7 = Sunday) pressing mode button to confirm. Push the mode by button to enter the programme mode for that day. Please note the lines on the left-hand side of the unit, when there is a line the program will be in comfort mode and when there is not, it will be in night mode. The time is also shown on the controller for reference. Press the + button to set when you would like the program to be comfort and - button for night mode. Push and hold the mode button to return to day selection and repeat for each day. Press mode to return back to the program when complete.</p> | | | |

TERMS AND CONDITIONS

You must immediately remove all packaging, inspect the goods and notify us of any damage to the goods within 3 days of delivery. We shall have no obligation to replace or repair damaged goods in the event of failure by the Buyer to comply with this provision. Radiators which are off an unacceptable standard or are damaged must not be installed. If any items are installed it will be treated as being as accepted as received.

Damaged goods being returned will only be collected from your delivery address, unless otherwise agreed in writing. Any other goods, which we accept back, are to be returned by you to our place of business at your expense.

Items will be accepted as a return which have not been installed or damaged after delivery. We do not accept liability for any damages sustained after delivery. Goods should be returned in their original packaging, provided such packaging and goods are undamaged.

We may issue a credit note for goods which we accept as returned.

We may agree to provide you with replacement goods prior to collecting or receiving back the goods to be returned (whether faulty, damaged or otherwise) but only on the condition that: the replacement goods are paid for in full and we reserve the right to re-invoice you in the event that the returned goods are found to be in a worse condition than when they were originally received by you or where such goods have not been received back to us within 3 months of the replacement goods being received by yourselves. A re-stocking charge of 30% will be applied to all non-faulty stock items that wish to be returned. Special order and non-stock products cannot be cancelled. Where cancellation or alteration of orders is accepted by us, you may be required to pay a restocking charge, to cover administrative costs and collection costs (if applicable); such charges to be determined by us. If the goods we deliver are faulty or damaged, we will meet the cost of the return, if the fault is reported to us within 3 working days.

The goods will be deemed to have been accepted when they have been delivered and we may not accept claims for any visible defects found after installation.

We accept no liability for any cost incurred relating to the cost of installation.

We shall not be liable for any plumber's costs, decorator's costs, transport costs, late penalties, or any other costs, as a direct or indirect result of (i) any defect in the goods (including but not limited to any manufacturing faults, such as leaks, that become apparent on or after installation) or (ii) late delivery of the goods.

GUARANTEES AND LIABILITIES – we are not the manufacturer of this product we will take all reasonable endeavours to make over to you the benefit of any warranty or guarantee given by the manufacturers. The item must have been fitted in accordance with British and or European standards as well as these fitting instructions.

PLEASE NOTE: That in accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we recommend flushing the heating system before installation of new radiators and then adding the correct quantity and type of inhibitor for use with the radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by the manufacturer warranty. It is the responsibility of the installer to ensure the correct use and suitability of the fixings provided. No liability for costs or damages arising from failure to do so can be accepted.